

**Step 4:** Type in your home Wi-Fi SSID and password, then Setting-  
\*GHz Wi-Fi is unavailable for now.



**Step 5:** Wi-Fi setting successes.

\*Check more Wi-Fi setting information on [www.solaixcloud.com/wifisetting/](http://www.solaixcloud.com/wifisetting/)

> Local Mode

Use your smart phone to connect the SoleX Wi-Fi signal (Wifi: SMxxxxxxx). Then touch Local and type in password (initially same as the Registration No.) to access the Local Mode in the Monitoring App.

\*Visit the local password setting instruction on [www.solaixcloud.com/wifisetting/](http://www.solaixcloud.com/wifisetting/)



06

> Monitoring Website  
Step 1: Ensure that your computer or laptop is connected to a network.

Step 2: Open a browser and enter [www.solaixcloud.com/](http://www.solaixcloud.com/)

Step 3: Select your display language and read the User guide, then create a new account.



**Step 4:** Complete registration, login, add site and other related operations according to the guidelines of the User guide.  
**Step 5:** Click the Warranty/Manage and add your installation information to get warranty for your devices.

07

#### SAFETY INSTRUCTIONS

- Prior to installation, ensure all power going to the inverter has been cut off.
- Keep away from flammable, explosive materials.
- Do not dismantle or repair by force.
- Children should be supervised to ensure that they do not play with the appliances.

\*Indicates that the product must not be processed with household waste. It must be brought to an authorized collection point for the appropriate recycling and disposal. By ensuring the appropriate disposal of this product, you also help in preventing potentially negative consequences for the environment and human health. The recycling of materials helps preserve our natural resources. For further information regarding the recycling of this product, please contact your local authorities or the regional office of the store where the product was purchased.


#### TECHNICAL DATA

Product Name	Pocket WiFi
Model	Pocket WiFi V3.0 (P/E)
Rated Voltage	5V/DC
Rated Power	1.3 W
Efficient Power	1.7 A/dBm(measured Max. Average)
Frequency	2.4 GHz
Antenna Gain	3 dBi
Antenna Type	FPC
Degree of Protection	IP 65
Operating Temperature	-40~55 °C
Humidity Mode	60%~11.5k/h
Dimension (P/E)	95.9*45.7*28.5 mm
Weight	60 g (P/E-4.07g)

08

#### APPEARANCE AND DIMENSIONS

Pocket WiFi V3.0 -P/E:

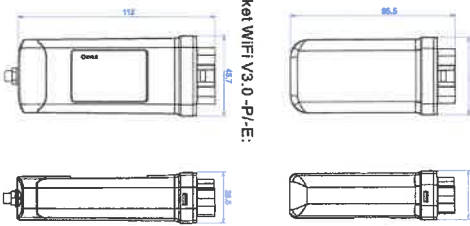

09

#### WARRANTY REGULATION AND LIABILITY

**Terms and Conditions**  
SoleX grants a standard 24-month warranty. The terms of this warranty begin from the date marked on the purchase invoice. SoleX will only perform warranty services when the faulty unit is returned to SoleX along with a copy of the invoice and proof of purchase issued by the dealer. In addition, the type label of the unit must be fully legible. If these requirements are not fulfilled, SoleX reserves the right to deny warranty services.

#### Exclusion of Liability

Warranty claims are excluded for direct or indirect damage due to:  
- Use of unit in ways not intended, improper or substandard installation, improper operation and unauthorized modification to the units, or repair attempts.  
- Missing warranty card and serial number.  
- Operating the units with defective protective equipment.  
- Influence of foreign objects and force majeure.  
- Inadequate ventilation.  
- Non-observance to relevant safety instructions.

10

#### PROOF OF PURCHASE

Retain this page as proof of your purchase. See warranty registration notice for more details.

Name ..... County .....

Phone Number ..... Zip Code .....

Email .....

Address .....

Product Serial Number .....

Date of Commissioning .....

Installation Company Name .....

Date of Delivery .....

Signature .....

SoleX Power Network Technology (China) Ltd., Ltd.  
ADD: Room 606, West Building A, No.625 Xud Road,  
Hangzhou, Zhejiang Province, China 310007  
TEL: +86 571 56970753  
FAX: +86 571 56970753  
EMAIL: [service@solapower.com](mailto:service@solapower.com)  
WEB: [www.solapower.com](http://www.solapower.com)

014-080210



# Pocket WiFi V3.0 (-P/-E) User Manual


Read the user manual carefully prior to use.

## 1. INSTALLATION




Ensure all power has been turned off at least 5 minutes prior to installation.

- Remove the cover of DOMGLE port at the bottom of the Inverter. Ready to install your Pocket WiFi.

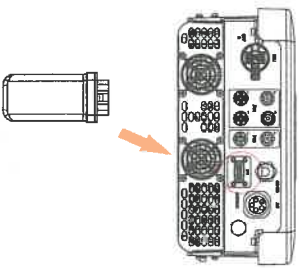

01


- For the -P/-E version of Pocket WiFi, screw the antenna to the end of the shell.

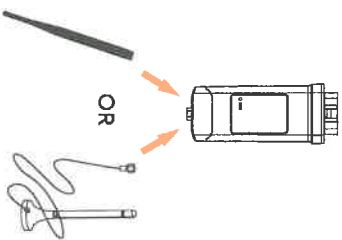

- P- External antenna
  - E- Extended antenna
- \*Antenna type is divided into external antenna and extended antenna. It is already selected when you purchase Pocket WiFi.

02

- Plug the Pocket WiFi into the correct port of Inverter.

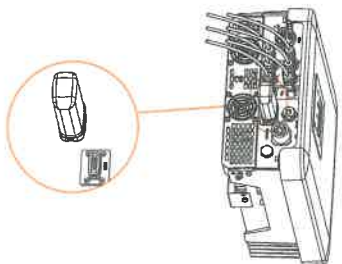

Note that the direction of the buckle needs to be consistent.

03

## 2. MONITORING

- SolexCloud Registration

Step 1: Use your smart phone to scan below QR code or search for the keyword "SolexCloud" in browser to download the Monitoring App.



Step 2: Touch the Setting button at upper left corner of the Monitoring App to choose language.

Step 3: Touch "Create a new account" at the bottom of Monitoring App.

Step 4: Type in or scan the Registration No. and type in other information to complete the registration.




04

- Wi-Fi Connection
- Step 1: Login your account and turn to Account page in the app.
- Step 2: Click "Wi-Fi Connection".



Step 3: Type in or scan the Registration No. of the Pocket WiFi. Then touch Next and agree to Join the network of the Pocket WiFi.



05